



## D-CO LED Floodlights

**A range of extremely compact LED floodlights in two body sizes with a simple aesthetic design**

- Supplied with stirrup and ground spike
- Visor to prevent obtrusive light
- Integral power supplies
- Pre-wired with 5m cable



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

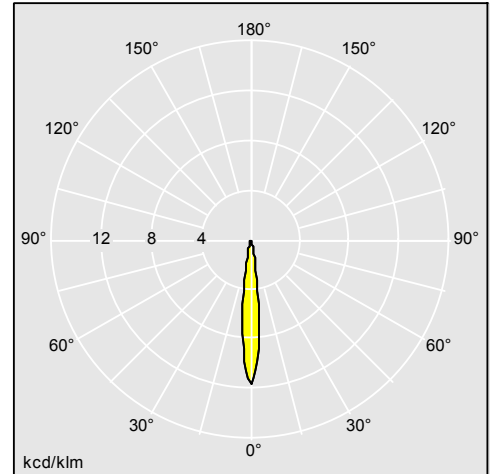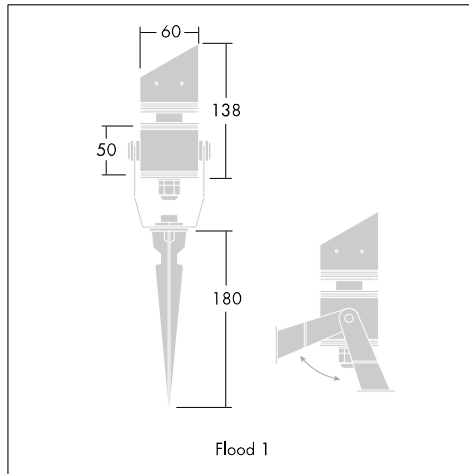

96257246

### Material/Finish

Floodlights

Body: aluminium, finished in grey

Glass: toughened glass

Gasket: anti-ageing silicone

Stirrup: aluminium finished in grey

Spike: aluminium finished in black

Connection boxes

Body: PC/ABS blend

### Installation/Mounting

Floodlights

Supplied pre-wired with 5m cable. Installation on surface with stirrup or in the ground with a spike.

Connection boxes

Two versions: One has 3 glanded cable entries 2 x PG13 (in) and 1 x PG9 (out), the other 8 glanded cable entries 2 x PG13 (in) and 6 x PG9 (out).

### Specification

To specify state:

LED floodlights in 2 sizes, pre-wired with 5m cable, with integral power supply and visor. 2 LED colours: cold white 4000K and warm white 3000K. Sealed to IP67. Stirrup and spike for surface or garden installation for accent lighting applications. As Thorn D-CO LED outdoor floodlight.

## D-CO LED Floodlights

**Ordering Guide** Supplied complete.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>D-CO LED Floodlights Size 1</b>				
D-CO FLOOD1 60 3L35 840 NB	LED		0,4	96633100
<b>D-CO LED Floodlights Size 2</b>				
D-CO FLOOD2 80 6L50 830 NB	LED		0,9	96633101
D-CO FLOOD2 80 6L50 840 NB	LED		0,9	96633102