




Urba Bollard

Stylish yet robust bollard enhancing urban areas

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered.
- Contemporary design which is easy to integrate into urban environments
- Robust, solid shape provides vandal resistant solution
- A light distribution with an optimised ULOR of 0 and asymmetric optic which reduces obtrusive light and glare
- LEDs offer low energy consumption, long lifetime and reduced maintenance



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

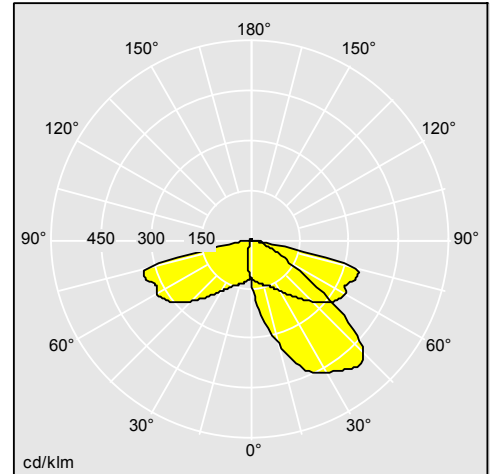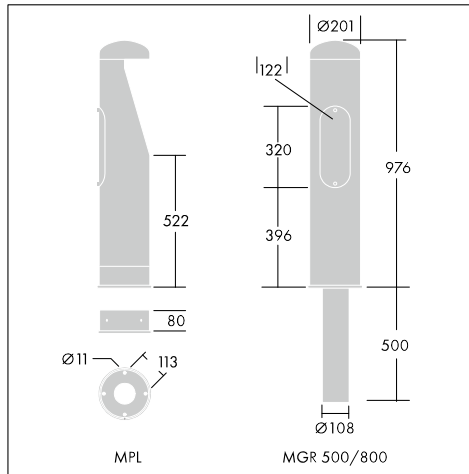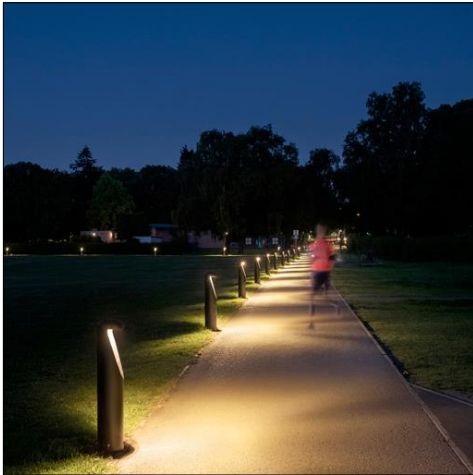

96275591

Material/Finish

Body and bezel: low carbon steel SS1142 : SS-EN 10130 material DC01. Cataphoresis treatment.
 Diffuser: clear 5mm polycarbonate plate
 Body and bezel colours: black (RAL 9005)

Installation/Mounting

Flange mounted. 500mm root to be fixed into concrete base. 800mm root to be fixed into the ground. Access door for connection box (not provided).

Specification

To specify state:
 Decorative steel bollard with clear diffuser and asymmetrical light distribution.
 As Thorn Urba.

Urba Bollard

Ordering Guide Supplied complete with LEDs. For flange mounting order the body and MPL base. For root mounting order the body and the MGR 500 or MGR 800 base.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Urba Body				
URBA BOLLARD 4L105 730 CL2	LED		12,9	96275588
URBA BOLLARD 4L105 730 CL1	LED		12,1	96275589
URBA BOLLARD 4L105 740 CL2	LED		12,8	96275590
URBA BOLLARD 4L105 740 CL1	LED		12	96275591
Urba Base				
URBA BOLLARD BASE MPL			2,4	96275592
URBA BOLLARD BASE MGR 500			6,35	96275593
URBA BOLLARD BASE MGR 800			9,5	96275594