




D-CO Bollard

A timeless bollard offering comfortable visual guidance

- Comfortable white light with no glare provided by a semi-opal anti-UV PC diffuser
- Suitable for any application thanks to high specs and two heights
- 60,000 hour lifetime (L80, 25°) ensures low maintenance costs
- Flange mounting, compatible with root spikes



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

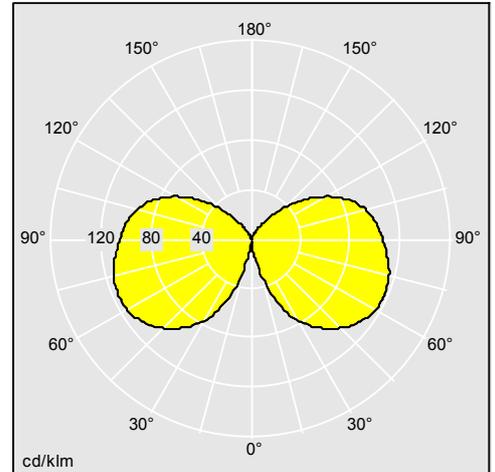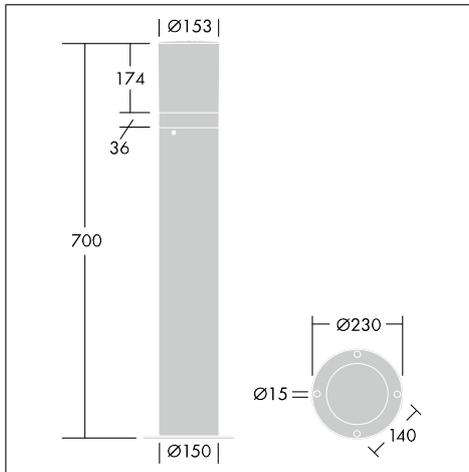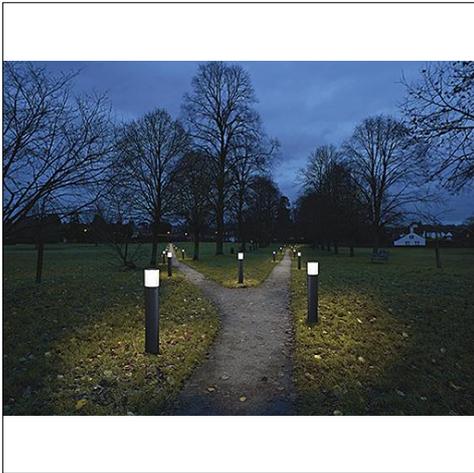

96262100

Material/Finish

Top and body: aluminium, powder coated grey 900
Diffuser: semi-opal anti-UV polycarbonate

Installation/Mounting

Suitable for flange mounting. Can fit a 450mm root spike to be fixed into concrete base. Can fit a 600mm root spike to be fixed into the ground.

Specification

To specify state:

Timeless design 14W LED bollard with semi-opal diffuser and symmetrical light distribution. Flange mounted.
As Thorn D-CO LED Bollard.

D-CO Bollard

Ordering Guide Supplied complete with LEDs

| Description | ILCOS Code | Socket | Wt (kg) | SAP Code |
|---|------------|--------|---------|----------|
| D-CO LED Bollard | | | | |
| D-CO LED BOLLARD 1000 30L50 830 CL2 CON | LED | | 5,45 | 96262098 |
| D-CO LED BOLLARD 700 30L50 830 CL2 CON | LED | | 4,15 | 96262099 |
| D-CO LED BOLLARD 1000 30L50 830 CL1 | LED | | 5,45 | 96262100 |
| D-CO LED BOLLARD 700 30L50 830 CL1 | LED | | 4,15 | 96262101 |
| D-CO LED BOLLARD 1000 30L50 840 CL2 CON | LED | | 5,45 | 96262143 |
| D-CO LED BOLLARD 700 30L50 840 CL2 CON | LED | | 4,15 | 96262144 |
| D-CO LED BOLLARD 1000 30L50 840 CL1 | LED | | 5,45 | 96262145 |
| D-CO LED BOLLARD 700 30L50 840 CL1 | LED | | 4,15 | 96262146 |
| D-CO LED BOLLARD 1000 30L50 830 CL2 | LED | | 5,45 | 96262257 |
| D-CO LED Bollard MGR base adaptors | | | | |
| MGR SPIKE RAZE/DCO/THOR/CANDLE BOL | | | 10 | 96635553 |
| MGR BASE RAZE/DCO/THOR/CANDLE BOL | | | 6 | 96635554 |