



Legend

A modern heritage post-top or suspended lantern upgraded with high performance light engines

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered. Models without illuminated top cap only.
- Beautiful aesthetics with the post top and suspended versions now almost identical for consistency
- Available with LEDs (3800/5000lm) for retrofits and more CPO versions
- Compatible with Bi power, DALI and Telea, providing advanced dimming and control to reduce energy consumption
- The post top lantern is now D60 as standard and available with or without an illuminated top cap



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

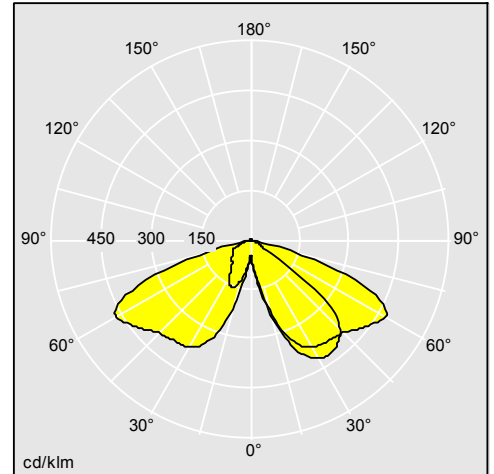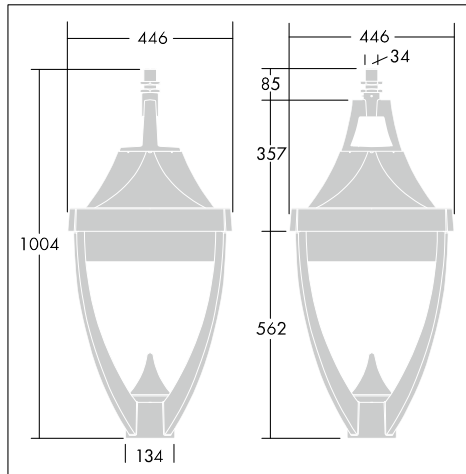

96262562

Material/Finish

Body: die-cast aluminium (EN AC-44300), powder coated grey 900 textured finish (close to RAL 7043)
 Enclosure: flat toughened glass
 Reflector: highly reflective anodised aluminium
 Standard corrosion class C5 according to ISO 9223: 2012.

Installation/Mounting

Post-top mounted (MTP) version on shaft through 3xM8 stainless steel screws on poles with D60mm x 100mm spigot.
 Suspended (MSU) version fixed through with a 34G threaded tube. Recommended mounting heights: 4 to 6m.

Brackets:

BILAM brackets fit post-top columns $\varnothing 60$ mm and suspended ($\varnothing 34$ mm) version with single or double arm. It exists also as wall mounted bracket. Aluminium with steel fixing shaft. Constituted with a $\varnothing 60$ mm aluminium tube, with a rectangular form (80x40mm) sustaining the lantern and two others decorative streamlined line.

EIFFEL mid-pole brackets fit $\varnothing 60$ mm cylindrical-tapered columns via a mounting plate with 2 fixing holes at 220mm centres. Available to receive lanterns in post-top ($\varnothing 60$ mm) or suspended ($\varnothing 34$ mm) versions with single or double arm. Aluminium with steel fixing shaft. Console for a lateral mounting on a conical-cylinder steel post, fixed by two screws M8-40 on two holes $\varnothing 11$ mm.

Specification

To specify state:

Post-top or suspended 4 arm lantern in die-cast aluminium painted in dark grey, flat toughened glass, with aluminium reflector embodied in an IP65 compartment. Decorative light emission on the top of the lantern / ULOR 0.

As Thorn Legend.

Legend

Ordering Guide All LED versions supplied with LEDs. Class I versions supplied complete with lamps. Class II versions lamps to be ordered separately.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Legend Suspended, LED				
LEGEND 36L50 RC 740 CL1 MSU 34G	LED		16,5	96262556
LEGEND 36L50 RC 730 CL1 MSU 34G	LED		16,5	96262557
LEGEND 36L50 RC 740 BP CL1 MSU 34G	LED		16,5	96262558
LEGEND 36L50 RC 730 BP CL1 MSU 34G	LED		16,5	96262559
LEGEND 36L50 RC 740 BP PM CL1 MSU 34G	LED		16,5	96262560
LEGEND 36L50 RC 730 BP PM CL1 MSU 34G	LED		16,5	96262561
LEGEND 36L70 RC 740 CL1 MSU 34G	LED		16,5	96262562
LEGEND 36L70 RC 730 CL1 MSU 34G	LED		16,5	96262563
LEGEND 36L70 RC 740 BP CL1 MSU 34G	LED		16,5	96262564
LEGEND 36L70 RC 730 BP CL1 MSU 34G	LED		16,5	96262565
LEGEND 36L70 RC 740 BP PM CL1 MSU 34G	LED		16,5	96262566
LEGEND 36L70 RC 730 BP PM CL1 MSU 34G	LED		16,5	96262567
LEGEND 36L50 RC 730 CL2 MSU 34G	LED		16,5	96262696
LEGEND 36L50 RC 740 CL2 MSU 34G	LED		16,5	96262697
LEGEND 36L50 RC 730 BP CL2 MSU 34G	LED		16,5	96262698
LEGEND 36L50 RC 740 BP CL2 MSU 34G	LED		16,5	96262699
LEGEND 36L70 RC 730 CL2 MSU 34G	LED		16,5	96262700
LEGEND 36L70 RC 740 CL2 MSU 34G	LED		16,5	96262701
LEGEND 36L70 RC 730 BP CL2 MSU 34G	LED		16,5	96262702
LEGEND 36L70 RC 740 BP CL2 MSU 34G	LED		16,5	96262703
LEGEND LED 36L50 RC 727 BP CL2 MSU34G U1	LED		16,5	96633428
LEGEND LED 36L50 RC 730 BP CL2 MSU34G U1	LED		16,5	96633502
LEGEND LED 36L50 RC 722 BP CL2 MSU34G U1	LED		16,5	96669730
Legend Post top, closed optic, LED				
LEGEND 36L50 RC 730 BP CL1 T60	LED		17,5	96262576
LEGEND 36L50 RC 740 BP CL1 T60	LED		17,5	96262577
LEGEND 36L50 RC 730 BP PM CL1 T60	LED		17,5	96262578
LEGEND 36L50 RC 740 BP PM CL1 T60	LED		17,5	96262579
LEGEND 36L70 RC 730 BP CL1 T60	LED		17,5	96262580
LEGEND 36L70 RC 740 BP CL1 T60	LED		17,5	96262581
LEGEND 36L70 RC 730 BP PM CL1 T60	LED		17,5	96262582
LEGEND 36L70 RC 740 BP PM CL1 T60	LED		17,5	96262583
LEGEND 36L50 RC 730 CL2 T60	LED		17,5	96262619
LEGEND 36L50 RC 740 CL2 T60	LED		17,5	96262620
LEGEND 36L50 RC 730 BP CL2 T60.	LED		17,5	96262623
LEGEND 36L50 RC 740 BP CL2 T60	LED		17,5	96262624
LEGEND 36L70 RC 730 CL2 T60	LED		17,5	96262627
LEGEND 36L70 RC 740 CL2 T60	LED		17,5	96262628
LEGEND 36L70 RC 730 BP CL2 T60	LED		17,5	96262631
LEGEND 36L70 RC 740 BP CL2 T60	LED		17,5	96262632
LEGEND 36L70 NR 730 BP CL2 T60	LED		17,5	96275399
LEGEND 36L70 NR 727 BP CL2 T60 U1	LED		17,5	96633426
LEGEND 36L50 RC 727 BP CL2 T60 U1	LED		17,5	96633427
LEGEND 36L50 RC 730 CL2 T60 U1	LED		17,5	96633497

Legend

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
LEGEND 36L50 RC 730 BP CL2 T60 U1	LED		17,5	96633498
LEGEND 36L70 RC 730 BP CL2 T60 U1	LED		17,5	96633499
LEGEND 36L70 NR 730 CL2 T60 U1	LED		17,5	96633500
LEGEND 36L70 NR 730 BP CL2 T60 U1	LED		17,5	96633501
LEGEND 36L70 NR 722 BP CL2 T60 U1	LED		17,5	96669728
LEGEND 36L50 RC 722 BP CL2 T60 U1	LED		17,5	96669729
Legend Post top, perforated optic, LED				
LEGEND 36L70 RC 740 BP RPF CL2 T60	LED		17,6	96262634
LEGEND 36L50 RC 740 RPF CL2 T60	LED		17,6	96262622
LEGEND 36L50 RC 730 BP RPF CL2 T60	LED		17,6	96262625
LEGEND 36L50 RC 740 BP RPF CL2 T60	LED		17,6	96262626
LEGEND 36L70 RC 730 RPF CL2 T60	LED		17,6	96262629
LEGEND 36L70 RC 740 RPF CL2 T60	LED		17,6	96262630
LEGEND 36L70 RC 730 BP RPF CL2 T60	LED		17,6	96262633
LEGEND 36L50 RC 730 RPF CL2 T60	LED		17,6	96262621
Legend LED retrofits, closed optic				
LEGEND GT LED 36L50 RC 740 CL1	LED		3,1	96262731
LEGEND GT LED 36L50 RC 730 CL1	LED		3,1	96262732
LEGEND GT LED 36L70 RC 740 CL1	LED		3,1	96262733
LEGEND GT LED 36L70 RC 730 CL1	LED		3,1	96262734
LEGEND GT LED 36L50 RC 740 BP CL1	LED		3,1	96262735
LEGEND GT LED 36L50 RC 730 BP CL1	LED		3,1	96262736
LEGEND GT LED 36L70 RC 740 BP CL1	LED		3,1	96262737
LEGEND GT LED 36L70 RC 730 BP CL1	LED		3,1	96262738
LEGEND GT LED 36L50 RC 730 CL2	LED		3,1	96262739
LEGEND GT LED 36L50 RC 740 CL2	LED		3,1	96262740
LEGEND GT LED 36L70 RC 730 CL2	LED		3,1	96262741
LEGEND GT LED 36L70 RC 740 CL2	LED		3,1	96262742
LEGEND GT LED 36L50 RC 730 BP CL2	LED		3,1	96262747
LEGEND GT LED 36L50 RC 740 BP CL2	LED		3,1	96262748
LEGEND GT LED 36L70 RC 730 BP CL2	LED		3,1	96262749
LEGEND GT LED 36L70 RC 740 BP CL2	LED		3,1	96262750
Legend LED retrofits, perforated optic				
LEGEND GT LED 36L70 RC 740 BP RPF CL2	LED		3,2	96262754
LEGEND GT LED 36L50 RC 730 RPF CL2	LED		3,2	96262743
LEGEND GT LED 36L50 RC 740 RPF CL2	LED		3,2	96262744
LEGEND GT LED 36L70 RC 730 RPF CL2	LED		3,2	96262745
LEGEND GT LED 36L70 RC 740 RPF CL2	LED		3,2	96262746
LEGEND GT LED 36L50 RC 730 BP RPF CL2	LED		3,2	96262751
LEGEND GT LED 36L50 RC 740 BP RPF CL2	LED		3,2	96262752
LEGEND GT LED 36L70 RC 730 BP RPF CL2	LED		3,2	96262753