THORN

www.thornlighting.com/catalogue > Outdoor Lighting > Recessed Architectural Floodlighting


Jalon

A small and efficient wall recessed luminaire for outdoor and indoor guidance

- Suitable for outdoor and indoor pathways and stairs with wide asymmetrical light beams from small dimensions (71x108mm)
- · Choice of vertical or horizontal versions and two colour temperatures
- Available complete with integral driver, LED light source and recessed box. The recessed box can also be ordered separately
- Polystyrene protection of the housing opening during installation



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

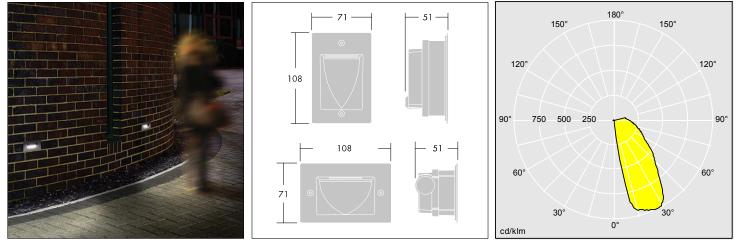

96271421

Material/Finish

Body front: die-cast aluminium, painted sanded dark grey (close to RAL 9007). Silver grey (close to RAL 9006) and white (close to RAL 9003) available on request (minimum order of 10 pieces). Other RAL colours available on request (minimum order of 50 pieces). Body rear: technopolymer Enclosure: polycarbonate Recessed box: polyethylene Recessed box enclosure: polystyrene Body and frame gasket: die-cut silicon External screws: stainless steel AISI304 Internal screws: chromium galvanized steel Flexible cable clamp: TPE for 9mm cable diameter

Installation/Mounting

Suitable for wall recessed mounting using recessed box. Maximum 9mm cable entry through recessed box with supplied grommet. Recessed box supplied with protective insert for installation into concrete walls. Luminaire fixed with 2 Allen screws, maximum 1Nm torque.

Specification

To specify state:

Small wall recessed range for pathway and stair lighting offering high performance. In two design models (vertical and horizontal) and two colour temperature versions (3000K/4000K). As Thorn Jalon LED.

www.thornlighting.com/catalogue > Outdoor Lighting > Recessed Architectural Floodlighting

Jalon

Ordering Guide Product supplied complete with driver and recessed box. Possibility to order the recessed box separately for installation.

Polystyrene cap to protect the housing opening.

The recessed box is the same for horizontal and vertical versions.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Jalon Horizontal				
JALON LED 12L18 830 MWA H	LED		0,3	96271423