



Feroz

Luminaire created to meet Transit Area applications and designed to meet all basic requirements in railway projects

- Combination in the same product of IP66, IK10 and very wide temperature range (-40°C to +50°C) for applications that need traditional moisture and impact features, however in extreme temperature environments
- Different mounting options: ceiling surface or suspended via wire or chain, vertical or horizontal wall mounting, corner mounting and suitable in unprotected outdoor areas
- Quiet, retracted and geometrical design
- Two installation types allows the installer to choose their preferred cabling method: either the luminaire can be wired through the end cap, or the luminaire can come with a versatile quick connector
- Low cost of ownership: lifetime 100,000h (25°C, L70), integrated dimming for further energy savings
- Vibration resistant, 4kV surge protection and class II fitting, making it suitable for many infrastructure and industrial applications



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

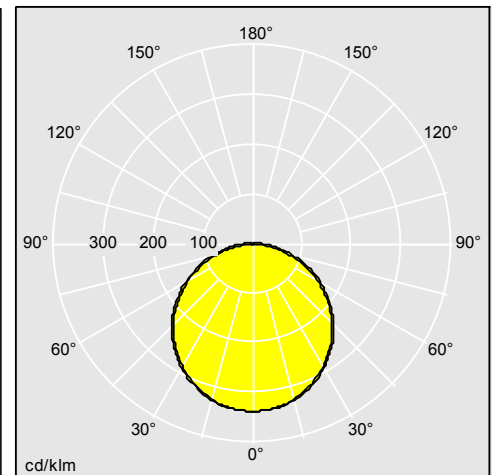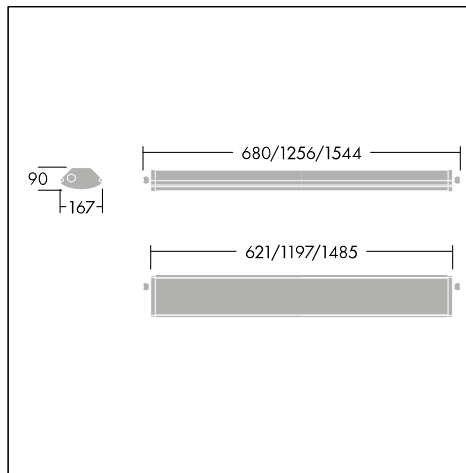

96630868

Material/Finish

Body: extruded aluminium, painted black (RAL9005)
 Gaskets: silicon
 Diffuser: opal or clear, impact resistant UV stabilised polycarbonate
 Endcaps: re-inforced (30% glass fibre and black carbon) polyamide (PA)
 Endcap fixing screws: stainless steel

Installation/Mounting

Suitable for surface installation (ceiling or wall), indoors or outdoors.

Specification

To specify state:

IP66, IK10 LED moisture proof luminaire: protection against dust and powerful jets of water. Electronic, fixed output or DALI dimmable control gear. Class II electrical. Opal or clear diffuser. 4000K; CRI>80; lifetime L90@50.000 hours. High efficiency up to 141 lm/W; UGR<25. Designed for BESA installation. Lengths: 600 mm (fixed output only, 2.000 lm and weight: 3,3 kg); 1200 mm (5.000 lm and weight: 5.15 kg) or 1500 mm (10.000 lm and weight: 6,1 kg). With built-in through wiring and optional Wieland connector. Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses. Ambient temperature range -40°C to +50°C.

As Thorn Feroz

Feroz

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Feroz, opal diffuser				
FEROZ LED4200-840 OP HF L1200 TW	LED		5,15	96630868
FEROZ LED8000-840 OP HF L1500 TW	LED		6,1	96630869
FEROZ LED8000-840 OP HF L1500 TW WL3	LED		6,1	96630879
Feroz, opal diffuser, dimmable				
<FEROZ LED8000-840 OP HFIX L1500 TW	LED		6,1	96630871
Feroz accessories				
FEROZ UNIVERSAL KIT			0,28	96630852
FEROZ HORIZ WIRE KIT			0,08	96630854
FEROZ SUSPENSION KIT			0,23	96630857