




Volupto

Elegance and intelligence for urban space

- Its elegant appearance and gentle glow brings safety and identity to any urban space
- The perfect focal glow with its high-tech mixing chamber, minimizes glare and maximizes efficiency for an unobtrusive luminous effect with 2 bowls esthetics
- Respectful of the environment with warm color temperature and reduced upward lighting <1% with dedicated optics
- Fully integrated motion detection sensor communicating through pilot wire or Zhaga interface
- Zd4i certified on request



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

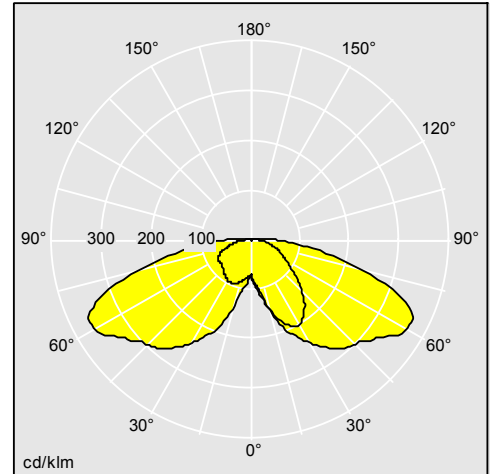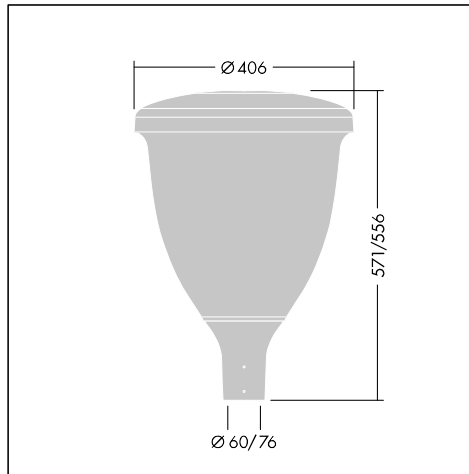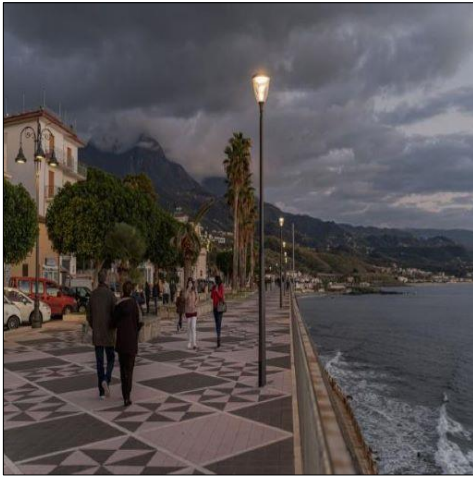

96631891

Material/Finish

Base and canopy: corrosion resistant die cast powder-coated aluminium (EN AC-44300) finished texturized anthracite grey (close to RAL7043) Via the configurator: Texturized light grey (GY), Black (BK) and 48 other RAL possibilities.

Corrosion class C5 according to ISO 9223: 2012.

Diffuser: UV stabilised polycarbonate semi-frosted or clear.

Internal reflector: highly reflective white.

Installation/Mounting

Post top mounting: on spigot/columns Ø60mm or Ø76mm. Low weight for ease of manipulation. Pre-wired for ease of installation, 1 tool. 120° fixing screws for perfect adjustment on the pole. Maintenance with access from above, 1 tool.

Specification

To specify state:

Decorative post top LED lantern, 2 enclosure finish, extensive optical, lumen and light distribution choice. Efficient R-PEC or A-PEC optic with a choice of light distributions for precise light placement with minimum waste of light. Comfortable for citizens, thanks to an optimized diffuser. Wide range of intelligent lighting control solutions: DALI2 dimmable(HFX), Bi-Power (BP), Constant Light Output (CLO), Bi-power Line (BPL), Light Reduction Twin Phases (LRT), Zhaga interface Up (ZU), Motion detection (MAS/SLA or MZ/SZ)

As Thorn Volupto

Volupto

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Volupto, Radial symmetric optic				
VO 18L35-740 SF RS CL2 W5 T60 ANT	LED		7,476	96631902
VO 18L35-740 SF RS CL1 W5 T60 ANT	LED		7,592	96631903
VO 18L50-740 SF RS CL2 W5 T60 ANT	LED		7,476	96631904
VO 18L50-740 SF RS CL1 W5 T60 ANT	LED		7,592	96631905
VO 18L70-740 SF RS CL2 W5 T60 ANT	LED		7,476	96631906
VO 18L70-740 SF RS CL1 W5 T60 ANT	LED		7,592	96631907
VO 18L105-740 SF RS CL2 W5 T60 ANT	LED		7,476	96631908
VO 18L105-740 SF RS CL1 W5 T60 ANT	LED		7,592	96631909
Volupto, Wide street comfort optic				
VO 12L35-740 SF WSC CL2 W5 T60 ANT	LED		7,416	96631888
VO 12L35-740 SF WSC CL1 W5 T60 ANT	LED		7,532	96631889
VO 12L50-740 SF WSC CL2 W5 T60 ANT	LED		7,416	96631890
VO 12L50-740 SF WSC CL1 W5 T60 ANT	LED		7,532	96631891
VO 12L70-740 SF WSC CL2 W5 T60 ANT	LED		7,416	96631892
VO 12L70-740 SF WSC CL1 W5 T60 ANT	LED		7,532	96631893
VO 12L105-740 SF WSC CL2 W5 T60 ANT	LED		7,416	96631894
VO 12L105-740 SF WSC CL1 W5 T60 ANT	LED		7,532	96631895
VO 24L35-740 SF WSC CL2 W5 T60 ANT	LED		7,473	96631896
VO 24L35-740 SF WSC CL1 W5 T60 ANT	LED		7,589	96631897
VO 24L50-740 SF WSC CL2 W5 T60 ANT	LED		7,473	96631898
VO 24L50-740 SF WSC CL1 W5 T60 ANT	LED		7,589	96631899
VO 24L70-740 SF WSC CL2 W5 T60 ANT	LED		7,473	96631900
VO 24L70-740 SF WSC CL1 W5 T60 ANT	LED		7,589	96631901
Volupto, clear (U1), street comfort optic				
VO 12L35-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632678
VO 12L50-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632679
VO 12L70-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632680
VO 24L35-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632682
VO 24L50-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632683
VO 24L70-730 U1 SC CL2 W5 T60 ANT	LED		9,135	96632684
Volupto ULOR <1%				
VO 18L35-730 U1 RSC CL2 W5 T60 ANT	LED		9,135	96632674
VO 18L50-730 U1 RSC CL2 W5 T60 ANT	LED		9,135	96632675
VO 18L70-730 U1 RSC CL2 W5 T60 ANT	LED		9,135	96632676
VO 18L105-730 U1 RSC CL2 W5 T60 ANT	LED		9,135	96632677