


Novaline Style

Contemporary versatility and functionality combined with elegant design, for lounge as well as for circulation areas

- Slim design available in three sizes, with black, white and silver bezels
- Available also with slight indirect light, ensuring comfort and uniformity
- Easy and simple to install, with a quick fix mounting system to optimize installation timings
- Sealed to IP54 and rated IK08 for a high degree of protection
- ADDITIONAL OPTIONS ARE AVAILABLE: DALI Dimmable, Emergency (E3, E3D), Bluetooth control, and different sensors. See myProduct for configuration options.



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

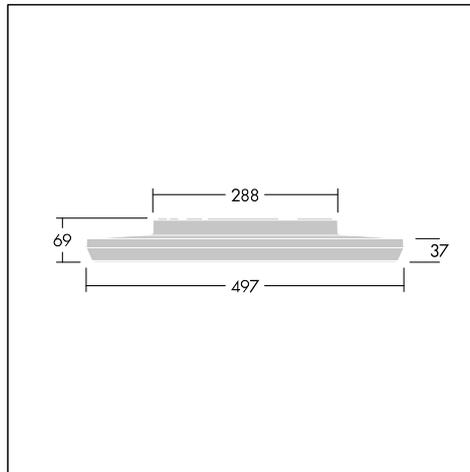

Material/Finish

Body: polycarbonate in white, black or silver

Diffuser: opal polycarbonate

Installation/Mounting

Suitable for installation directly on walls or ceilings. Easy and simple to install, with a quick fix mounting system to optimize installation timing.

Specification

To specify state:

Elegant, slim, functional, and well-protected luminaire for installation on walls and ceilings. The elegant shape, with a height of only 69mm, is available in three dimensions (Ø320, Ø397mm & 497mm), in white, black, or silver bezel, each with 2 different lumen packages, in warm white (3000K) and cool white (4000K), CRI 80. Diffuse lighting distribution, also available with slight indirect lighting, generating both comfort and uniformity. IP54 and IK08 rated, ensuring a high level of protection. Lifetime: 50 000 hours L80. The emergency versions, E3 (3 hours manual test) and E3D (3 hours self/addressable test) come with a Lithium ION battery with 3 levels of protection and 3 years warranty. Available also with DALI, basicDIM, Microwave Sensor (wired Master/Slave), Bluetooth and mobile apps.

As Thorn Novaline Style.

Novaline Style

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Novaline Style S				
NOVS S 1400-840 DI HF WH	LED		1,66	96635313
NOVS S 1900-840 DI HF WH	LED		1,66	96635314
NOVS S 1400-840 DI HF BK	LED		1,68	96635517
NOVS S 1900-840 DI HF BK	LED		1,66	96635598
Novaline Style S, dimmable				
NOVS S 1400-840 DI HFI WH	LED		1,68	96635516
NOVS S 1900-840 DI HFI WH	LED		1,68	96635518
NOVS S 1400-830 DI HFI WH	LED		1,68	96635521
NOVS S 1900-830 DI HFI WH	LED		1,68	96635522
NOVS S 1400-840 DI HFI SR	LED		1,68	96635528
NOVS S 1900-840 DI HFI SR	LED		1,68	96635529
NOVS S 1400-840 DI HFI BK	LED		1,68	96635533
NOVS S 1900-840 DI HFI BK	LED		1,68	96635534
Novaline Style S, emergency				
NOVS S 1900-840 DI HFI E3D WH	LED		1,96	96635526
NOVS S 1900-840 DI HF E3 WH	LED		1,94	96635527
Novaline Style M				
NOVS M 2500-840 DI HF WH	LED		2,12	96635315
NOVS M 3500-840 DI HF WH	LED		2,12	96635316
Novaline Style M, dimmable				
NOVS M 3500-840 DI HFI WH	LED		2,14	96635354
NOVS M 2500-840 DI HFI WH	LED		2,14	96635519
NOVS M 2500-830 DI HFI WH	LED		2,14	96635523
NOVS M 3500-830 DI HFI WH	LED		2,14	96635524
NOVS M 2500-840 DI HFI SR	LED		2,14	96635530
NOVS M 3500-840 DI HFI SR	LED		2,14	96635531
NOVS M 2500-840 DI HFI BK	LED		2,14	96635535
NOVS M 3500-840 DI HFI BK	LED		2,14	96635536
Novaline Style M, emergency				
NOVS M 2500-840 DI HF E3 WH	LED		2,4	96635319
NOVS M 3500-840 DI HF E3 WH	LED		2,4	96635361
NOVS M 3500-840 DI HFI E3D WH	LED		2,42	96635362
Novaline Style L				
NOVS L 4000-840 DI HF WH	LED		2,87	96635317
Novaline Style L, dimmable				
NOVS L 5000-840 DI HFI WH	LED		2,87	96635318
NOVS L 5000-840 DI HFI SR	LED		2,89	96635363
NOVS L 5000-830 DI HFI WH	LED		2,89	96635426
NOVS L 5000-840 DI HFI BK	LED		2,89	96635429
NOVS L 4000-840 DI HFI WH	LED		2,89	96635520
NOVS L 4000-830 DI HFI WH	LED		2,89	96635525

Novaline Style

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
NOVS L 4000-840 DI HFI SR	LED		2,89	96635532
NOVS L 4000-840 DI HFI BK	LED		2,89	96635549
Novaline Style L, emergency				
NOVS L 5000-840 DI HFI E3D WH	LED		3,17	96635430
Novaline Style accessories				
NOVS M/L SUSP SET AST2 WH			0,848	96635680
NOVS M/L SUSP SET AST4 WH			0,871	96635681
NOVS M/L SUSP SET AP1 WH			0	96635684
NOVS M/L SUSP SET AP2 WH			0	96635685
NOVS S SUSP SET AP1 WH			0	96635682
NOVS S SUSP SET AP2 WH			0	96635683