


ROHRflex PA 12F+ (Multilayer)

ROHRflex+ multilayer corrugated plastic tubings

multilayer corrugated plastic tubing especially for outdoor applications with internationally approved standards, V2 acc.UL 94, EN 45545-2 (HL3).

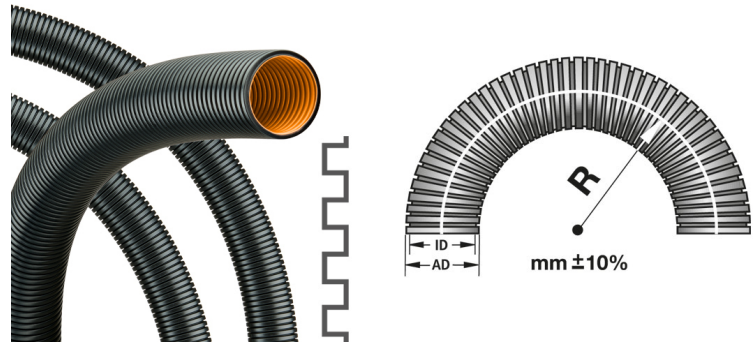

Temperature: -50°C ... +120°C ^ +150°C

Material: pa 12 plastics

CHARACTERISTICS:

- high alternate bending strength
- oil and benzine resistant
- widely resistant to acid and solvents
- free of silicone, cadmium, halogen
- highly self-extinguishing
- flame retardant
- excellent UV-resistance
- REACH and RoHS compliant

APPLICATIONS:

- Application: railway industry (especially for outside applications and tunnels)



** VDE valid for OD 15,8 - 54,5 mm

FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
11249202006	Black	10,0	fine	6,6	10,0	13	35	0,020	50
11249202010	Black	13,0	fine	9,9	13,0	15	45	0,025	50
11249202012	Black	15,8	fine	12,3	15,9	25	55	0,040	50
11249202016	Black	21,2	fine	16,7	21,5	35	75	0,070	50
11249232023	Black	28,5	coarse	21,6	28,7	55	100	0,105	50
11249232029	Black	34,5	coarse	27,7	34,7	65	120	0,125	25
11249232036	Black	42,5	coarse	35,7	42,5	90	150	0,150	25
11249232048	Black	54,5	coarse	46,7	54,5	100	190	0,250	25

** VDE valid for OD 15,8 - 54,5 mm

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.